


# ZHO-1560L/S Open Frame Solenoids

ZHO




总重量 Total Weight: 380g  
应用范围: 用于打卡钟, 门锁等  
APPLICATION: TIME CLOCK, DOOR LOCK etc

类型: 拉式 TYPE: PULL

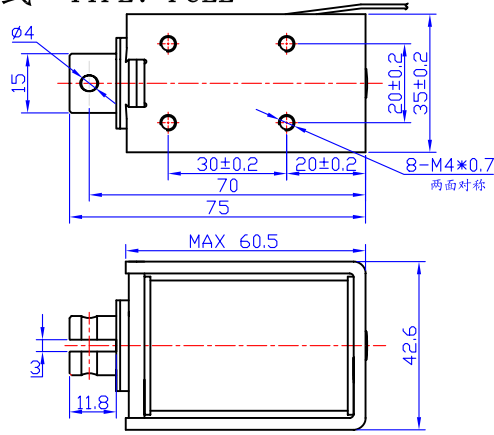


单位:mm Units:mm 通电状态 Shown Energized

滑杆外部与负载连接的典型结构  
plunger type:



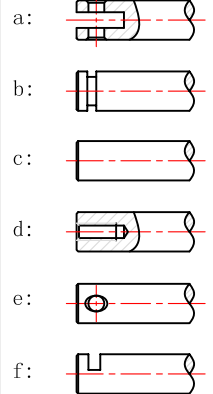


类型: 推式 TYPE: PUSH

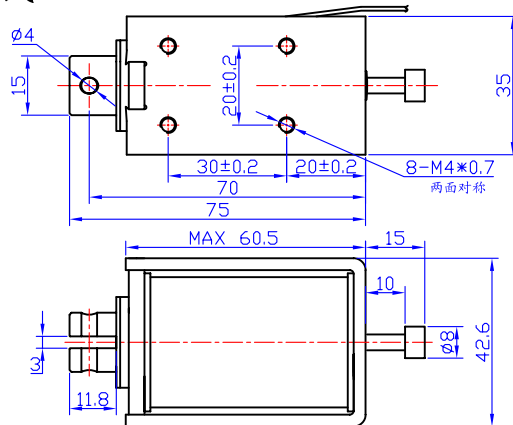

单位:mm Units:mm 通电状态 Shown Energized

顶杆外部与负载连接的典型结构  
push shaft type:

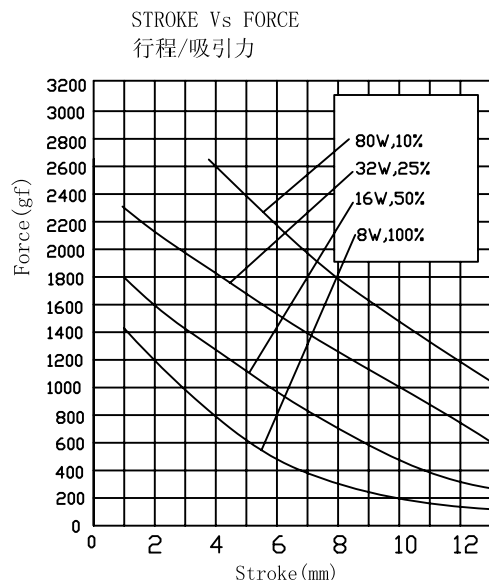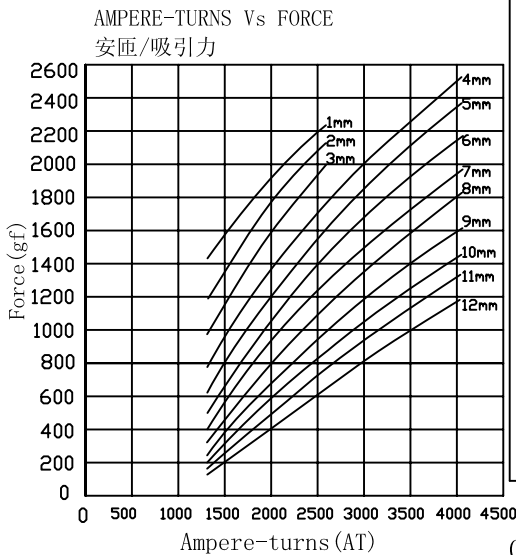

### COIL DATA线圈资料

Duty cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$			连续 Continuous	间断 Intermittent		
工作周期 (%) = $\frac{\text{工作时间}}{\text{工作时间} + \text{断开时间}} \times 100\%$			100%	50%	25%	10%
MAX. "on" time in seconds 最大工作时间 (秒)			∞	140	50	9
Watts at 20° 瓦特数 (在20°)			8	16	32	80
Ampere-turns at 20° 安匝值 (在20°)			1240	1750	2480	3958
Type no.	Resistance (20°C) Ω ± 10%	No. Turns	VoltS DC 电压			
型号	阻值 (Ω) ± 10%	线圈匝数				
ZHO-1560L/S	4.5	950	6	8.5	12	19
	18	1900	12	17	24	38
	72	3750	24	34	48	76
	288	7400	48	68	96	152